




**INNOVATIVE SAFE
FOR CERTIFIED
GRADE II AND III
BURGLARY PROTECTION
– MEETS POLICE
APPROVED STANDARDS**

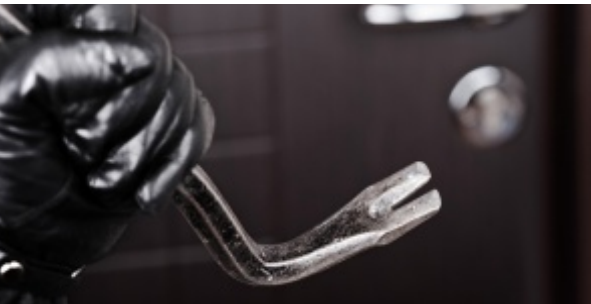

PROGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grades II and III
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means greater installation options
- Innovations made with the Grade III models means that a higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity
- The three-way boltwork is constructed with solid steel bolts
- ProGuard has a modern design with an ergonomic soft-touch handle
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts
- Dependent on Grade, a Class A key lock or a Class B high security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Grade III models must have a minimum of 1 x Class B lock fitted as standard
- Every model can be customised with a range of internal fittings to maximise storage capacity
- Attractive dark grey (RAL 7016) appearance

PROGUARD

PRODUCT SPECIFICATIONS

Model	External height (mm) Gd II/III	External width* (mm) Gd II/III	External depth**(mm) Gd II/III	Internal height (mm) Gd II/III	Internal width*** (mm) Gd II/ III	Internal depth (mm) Gd II/III	Volume (litres) Gd II/III	Weight (kg) Gd II/III
60	530	500	521	430/440	400/410	360/359	62/65	237/208
110	690	600	561	590/600	500/510	386/396	114/121	346/320
150	875	600	561	775/785	500/510	386/396	150/159	426/386
200	1150	600	561	1050/1060	500/510	386/396	203/214	519/481
300	1600	600	561	1500/1510	500/510	386/396	290/305	676/636
350	1600	675	585	1500/1510	575/585	410/420	354/371	764/701
450	1850	675	616	1750/1760	575/585	440/450	443/463	895/827

Projection of hinge *(20mm) and handle **(65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm.

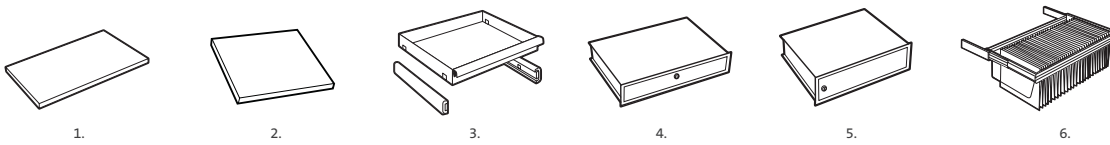

INTERNAL FITTINGS

1. Shelf - 20mm high - all sizes - max capacity 60kg
2. Reinforced shelf - 20mm high - all sizes - max capacity 120kg
3. Extendable shelf - 37mm high - sizes 110-450
4. Full width drawer - 100mm high - sizes 110-450
5. Lockable cupboard - 335mm high - sizes 110-450
6. Pull out file frame - 37mm high - sizes 110-450

LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. For Grade III models, at least one EN 1300 Class B lock must be fitted as standard.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

IMPROVED CAPACITY

Innovations made with the Grade III models have allowed the thickness of the safe walls to be reduced. This means that a safe with a higher level of protection will also offer greater capacity for the storing of valuable items.

BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grades II and III.

A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



Approved by the Association of Insurance Surveyors

ACCREDITED BY SECURED BY DESIGN



Secured by Design is the only way for products to achieve police accreditation in the UK.

In order to achieve Secured by Design status the ProGuard range of safes had to adhere to rigorous test standards required by the police.

Authorised dealer

www.chubbsafes.com