

Fire-resistant certified  
filing cabinet for  
professional storage of  
important documents



# Fire File 25"

FIRE RESISTANT DOCUMENT PROTECTION


## Key features

- Certified for one hour's fire protection of documents according to UL Standard 72, Class 350 Endurance
- Maximised storage capacity that allows users to gain full advantage for their storage requirements. Chubb Safes Fire File 25" is available with 2 or 4 drawers
- Easy operable day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just be pushed closed
- High-quality steel sliders to ensure comfortable operation and full drawer access
- Lighter weight construction which means smoother transportation and installation
- All models fitted with key lock as standard
- Light grey, powder-coated finish and modern design which blends nicely into any office environment
- Chubb Safes Fire File 25" is manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems

**Chubb Safes**  
*Trusted the world over.*

## Product Specification

Model	External (mm)			Drawer dimensions (mm)			Weight (kg)	Capacity (litres)
	Height	Width	Depth	Height	Width	Depth		
2 drawers	784	551	635	290	387	460	164	104
4 drawers	1510	551	635	290	387	460	291	208

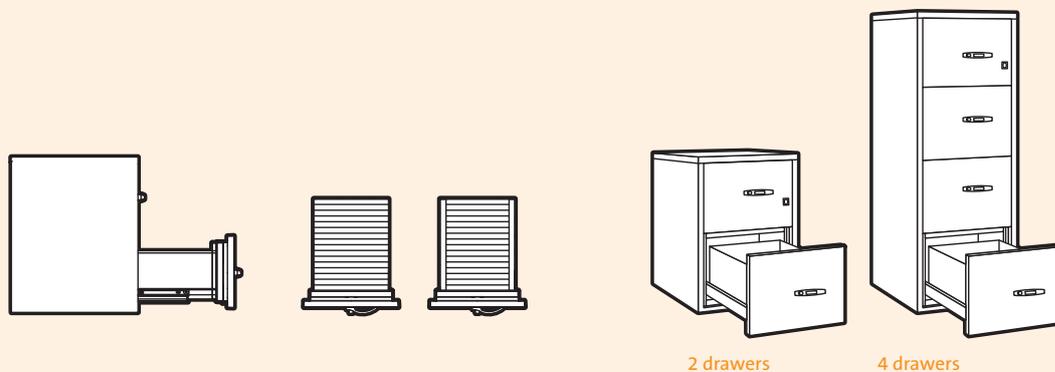

2 drawers

4 drawers

### Lock Options



Combination lock



Key lock

Chubb safes Fire File 25" models are fitted with a single key lock as standard. They can be equipped with a mechanical combination lock for dual locking on request. In addition a key lock can be fitted to each drawer for an independent locking option. All non-standard locking options are available with an extended lead time and at an additional cost.

### Finish

Color: Light Grey RAL 7035

Authorised dealer

### Fire Testing

The Chubb safes Fire File 25" cabinets are tested and certified according to the most common and well-established UL (Underwriter's Laboratories) Standard 72 to Class 350 1 hour Fire Endurance. The products are subjected to extensive fire testing which simulates the impact of a severe fire. This two-step process includes the following:

#### Step 1

The filing cabinet is placed in a furnace and heated to a temperature of 1000°C. The furnace is switched off after one hour. The unit remains in the furnace until the temperature returns to ambient levels. The content is then examined for signs of damage. Both during furnace heating and the subsequent cooling period, the recorded internal temperature must not have exceeded 177°C (or 350°F).

#### Step 2

Fire explosion or Shock test. To simulate sudden heating, possibly as a result of rapid fire spread, the cabinet is inserted into a preheated furnace. The stresses and strains such rapid heating creates can easily cause a poorly constructed unit to fail. At all times internal temperatures are not allowed to exceed those set for the Step 1 fire endurance test.

**Chubb safes**  
Trusted the world over.

[www.chubbsafes.com](http://www.chubbsafes.com)

'Chubb' is owned by Chubb plc and is a registered trademark used under license